




X-BLUE



WATER

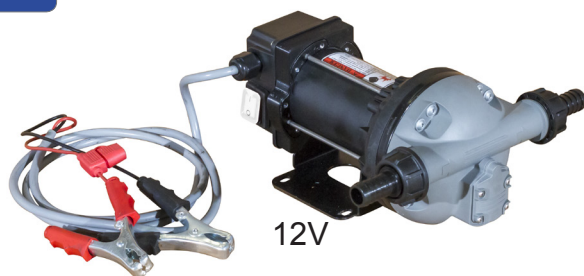

12V



230V - 115V

FEATURES	12V DC	230V AC 50Hz	230V AC 60Hz	115V AC
Voltage AC [V, Hz]:	12	230, 50	230, 60	115,60
Max Current [A]:	20	1,95	1,95	3,5
Potenza [W]:	200	350	350	350
Engine protection	IP55	IP55	IP55	IP55
Switch On/Off	Yes	Yes	Yes	Yes
Cable [m]:	4	2	3	2
Ciclo di lavoro [min]:	S2 20	S2 20	S2 20	S2 20
Max Flow rate [LPM / GPM]:	36 / 9,2	34 / 9	34 / 9	34 / 9
Max pression [bar]:	1,5	1,5	1,5	1,5
Dry suction [m]:	2	2	2	2
Internal By-Pass Valve:	Yes	Yes	Yes	Yes
Internal filter [µm]:	No	No	No	No
Engine Holder:	Yes	Yes	Yes	Yes
Inlet/Outlet [BSPP]:	1" M / 1" M	1" M / 1" M	1" M / 1" M	1" M / 1" M
Seals materials:	Viton	Viton	Viton	Viton
Temperature min/max [°C]:	-5 / +40	-5 / +40	-5 / +40	-5 / +40
Allowed fluids:	AdBlue, AUS 32, Water		AdBlue, AUS 32, Water	
Forbidden fluids:	Gas, Alcool, Gasoline, Diesel, Kerosene		Gas, Alcool, Gasoline, Diesel, Kerosene	
Noise at 1 m [dB]:	70	70	70	70
Net Weight [Kg]:	5	6	6	6
Gross weight [Kg]:	6	7	7	7

Accessories:

On request 4 m cable